

# Prolific® Under-Mount Kitchen Sink K-23652

#### **Features**

- 48" minimum base cabinet width with standard installation.
- 45" minimum base cabinet width with customized installation.
- Large Single bowl.
- 10-inch depth provides generous workspace.
- No faucet holes.
- SilentShield® sound-absorption technology offers quieter performance.
- Three graduated ledges in basin allow you to place accessories at your preferred height.
- Beveled cone-shape slopes into the drain, easily disposing debris.
- Includes a bamboo cutting board which fits securely on the sink. Cutting board covers ½ of the sink providing an easy-to-clean work surface while still maintaining access to the sink.
- Includes two durable dishwasher-safe grated racks that provide a convenient shelf for drying, rinsing, and defrosting.
- Includes a durable dishwasher safe wash bin and colander for draining pasta, washing dishes, or defrosting meat.
- Includes installation hardware.

#### Material

Handcrafted from 18-gauge stainless steel.

#### Installation

Under-mount

#### **Components**

Product includes:

K-23680 Large Bamboo Cutting Board

K-5544 Colander and Washbin

K-5542 Multipurpose Grated Rack

K-5542 Multipurpose Grated Rack



Codes/Standards ASME A112.19.3/CSA B45.4

Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks


See website for detailed warranty information.





### **Prolific®**

## Under-Mount Kitchen Sink K-23652

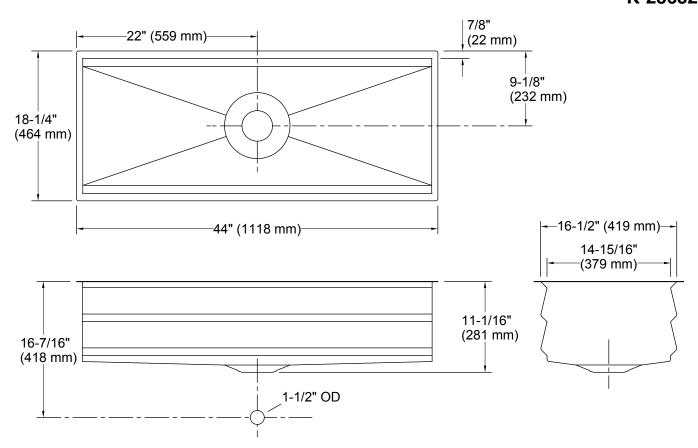

#### **Technical Information**

All product dimensions are nominal. Installation: Under-mount

Bowl area (Only) Length: 42-1/2" (1080 mm)

Width: 14-15/16" (379 mm) Bowl depth: 10-1/8" (257 mm) Water depth: 10-1/8" (257 mm)

Drain hole: 3-3/4" (94 mm)

Template: 1311447-7, required, included

#### **Notes**

Install this product according to the installation instructions.

Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-43-FOCUS). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

